prefix systems





ORDER FORM

Please email back to orders.south@prefixsystems.co.uk

Contact Name:
Company:
Delivery address:
Postcode:
Tel:
Email:
Order Date:
Date Required: / /
Customer Reference:

Standard Frame (RAL 7016 - 30% Gloss)		
Bespoke Frame: RAL: (price & lead time on application	Gloss:	
Standard Glazing: double glazed, toughened glass unit, black ceramic border. Warm edge spacer bar low E, Argon filled, 1.2 U-value.		
Triple Glazing: triple glazed, toughened glass unit, black ceramic border. Warm edge spacer bar low E, Argon filled, 0.6 U-value.		
(price & lead time on application for triple & other bespoke glazing options) Maximum glazed area 3m²		
Application:		
Domestic Commerical	Existing Building New Build	

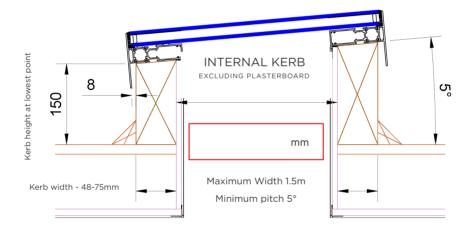

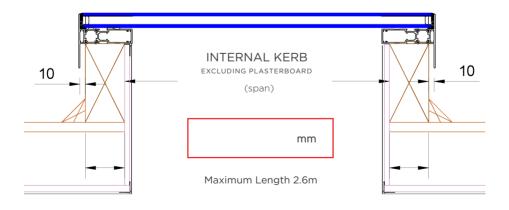

Kerb Thickness: mm